

CO₂

Rotary



UV Print



Indoor



Surface

Matte (continued from previous page)


Surface / Core Colour

Brown / White	21930 (1/16")
Chocolate Brown / White	21876 (1/16")
Grey / White	21856 (1/32") 21927 (1/16")
Grey / Black	21915 (1/16")
Black / White	21849 (1/32") 21917 (1/16") 21981 (3/32")
Black / White / Black	22009 (1/16")* 29732 (1/8")*
Black / Yellow	21940 (1/16")

* Double Sided, 3 Ply

The surface layer of Gravoply™ 2 can be lasered but the quality of the engraving may vary depending on the colours.

Laser cutting is not recommended.

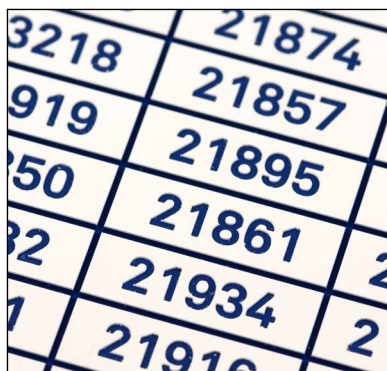

BENEFITS

- Microthin surface layer
- Perfect for small characters and detailed logos
- Gravoply™ 2 Gloss has an extra durable, scratch resistant, glossy cap

APPLICATIONS

Badges, identification plates, interior signage...

SPECIFICATIONS

Finish	Matte
Composition	ABS, 2-ply
Engraving Depth	.004"
Full Sheet	24" x 48"
Half Sheet	24" x 24" (add -H)
Quarter Sheet	12" x 24" (add -Q)
Other Size(s)	-

CAPABILITIES

Interior	■
Exterior	-
Shear	■
Saw	■
Screen Print	■
Hot Stamp	■
Heat bending	■
Scratch resistant	■
Flexible	■
Break resistant	■
UV resistant	-
Min. temp.	-40°C (-40°F)
Max. temp.	80°C (176°F)

TECH TIPS

You can mix any surface and core colours on demand. Double-sided products are also available.